

Plierench[®]

The Versatile Hand Tool for Everyone!

THE TOOL THAT MAKES AMATEURS PROFESSIONAL—
AND PROFESSIONALS MORE VERSATILE

Parallel jaw action is powerful yet delicate. No scissors type action to chew corners of fittings.

Universal jaw for miscellaneous angular surfaces, irregular contours. Wide gripping surfaces. Maximum opening 1½". Longitudinal grooves for tip-end wire bending. Transverse grooves for gripping stubborn nuts on corners.

Accurately broached and milled to assure precision action.

Handy wire-cutting mechanism.

Drop forged from tool steel and heat-treated for extra strength and toughness. Black oxidized finish for lasting appearance.

Red vinyl handle covers provide a non-slip grip.

Cut vinyl tip off frame handle for emergency screwdriver.

Longitudinal grooves facilitate tip-end wire bending in inaccessible positions. Transverse grooves add 15% more torque by gripping stubborn nuts on opposing corners.

Unique 10 to 1 power ratio multiplies a 10-pound grip on handles to 100 pounds of jaw force. (regular 8½" pliers have a 3 to 1 power ratio.)


CUTAWAY VIEW OF GEAR ACTION

Oblique downward pull of spring-loaded pinion gear disengages sliding jaw to permit: 1) quick adjustment of jaw gap, 2) quick release for appropriate jaw insertion, or 3) quick adjustment of grip to comfortable hand size.

Handles adjust to notch in the jaw to give you a grip opening to fit your hand size comfortably. No need to grip fittings with the handles wide apart.


Your Choice of

Problem-Solving Jaws




WIRE BENDER JAW

Special jaw for bending wire, crimping light metal.

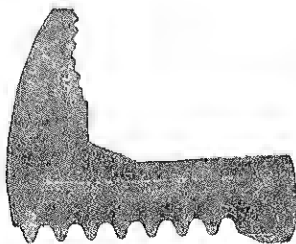

SMALL PIPE JAW

Ideal for working with small diameter pipe, rounds, chewed nuts, etc. Opens to 1½".

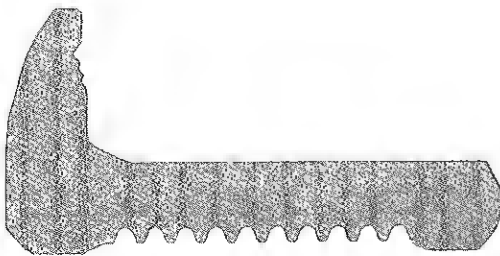


GIANT PIPE JAW

Provides a wider range than Universal Jaw. Opens to 3".

ACTUAL SIZE

FRAME HANDLE

GEAR HANDLE

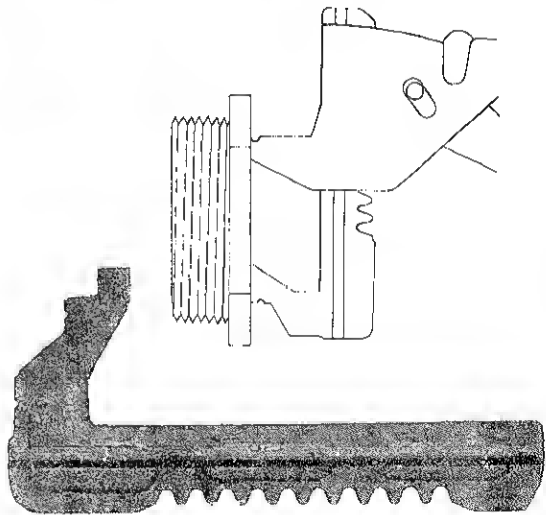

GIANT INTERNAL/EXTERNAL JAW

Fits into Plierench grooves from left to right, or right to left!! Used as either a wide-jaw gripping tool with maximum opening of 3", or in reverse as an internal gripper or expander, as shown in sketch! Internal range from 5/8" to 3¼".

The "internal" jaw faces, 1/4" apart, offer stepwise expansion with fewer jaw adjustments. Also usable as a spud wrench, alignment tool or emergency jack for raising weights up to 500 pounds.



Custom Plastic Pouch stores accessory jaws. Grommets are provided to facilitate wall mounting.